



The StreamLine™ Standing Seam is the only metal roofing panel with a patented no-siphon dry lock seam, with a unique reversing feature to allow installation of panels from both directions starting at any location. The panel is designed with softer, less industrial lines to provide an architecturally pleasing appearance.





- Prevents crowning
- No visible screws required
- Sharp, professional appearance


KEY FEATURES

- 16" coverage
- 26 Tru-Gauge™
- Factory-notched panels available
- Vertical interlocking application: allows installation from both directions starting at any location
- Patented no-siphon lock seam
- 1 1/8" vertical rib with 3/8" flat top for ease of flashing attachment
- Concealed fasteners: fasteners cannot leak
- Pre-slotted fastener flange: allows expansion/contraction of panel
- UL580 Class 90 wind uplift
- UL Class A fire rated
- 3:12 minimum pitch recommended: for lower pitches please inquire
- Standard panel lengths 2' to 35': for longer panels, please inquire
- Pan options: Flat pan, Accent ribs, Striations


PANEL PROFILES

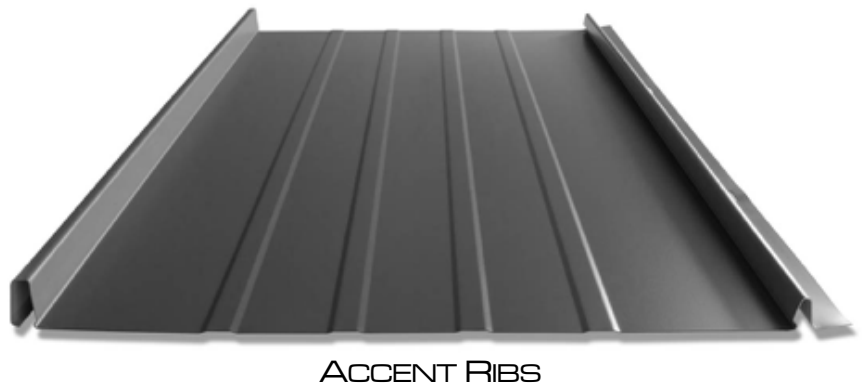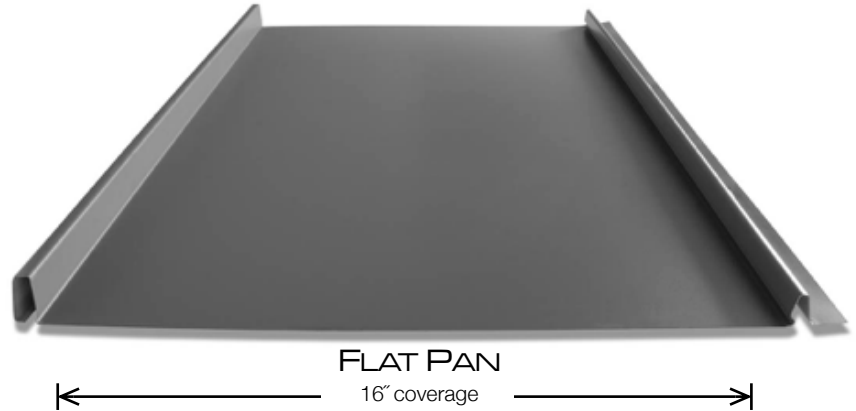

LOCK SEAM DETAIL



REVERSE LAP DETAIL

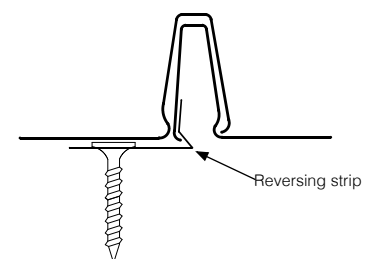

MATERIAL SPECIFICATIONS


- 26 gauge ARMOR TECH™ SMP Painted Steel
.019" (thickness prior to painting)
AZ-50 Substrate
- 26 gauge bare Zincalume® Plus with Clear
Acrylic Coating AZ-55

Standard Weight

Width	Gauge	Color	LBS SQFT	LBS LF
16"	26	ArmorTech	1.13	1.13


KEY FEATURES

- 15 Standard Colors
- ARMOR TECH™ Paint System-the ultimate in exterior durability
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1.1 mils
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

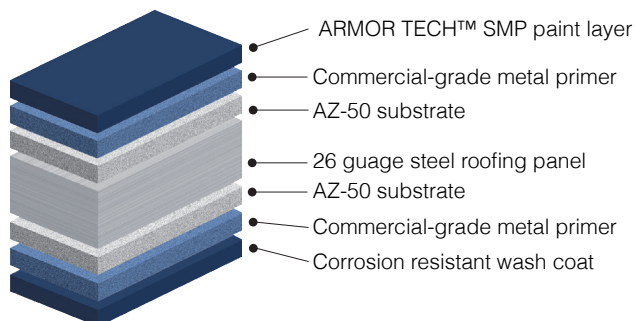

STANDARD COOL ARMOR TECH™ SMP COLORS

40-Year Residential Manufacturer's Limited Warranty

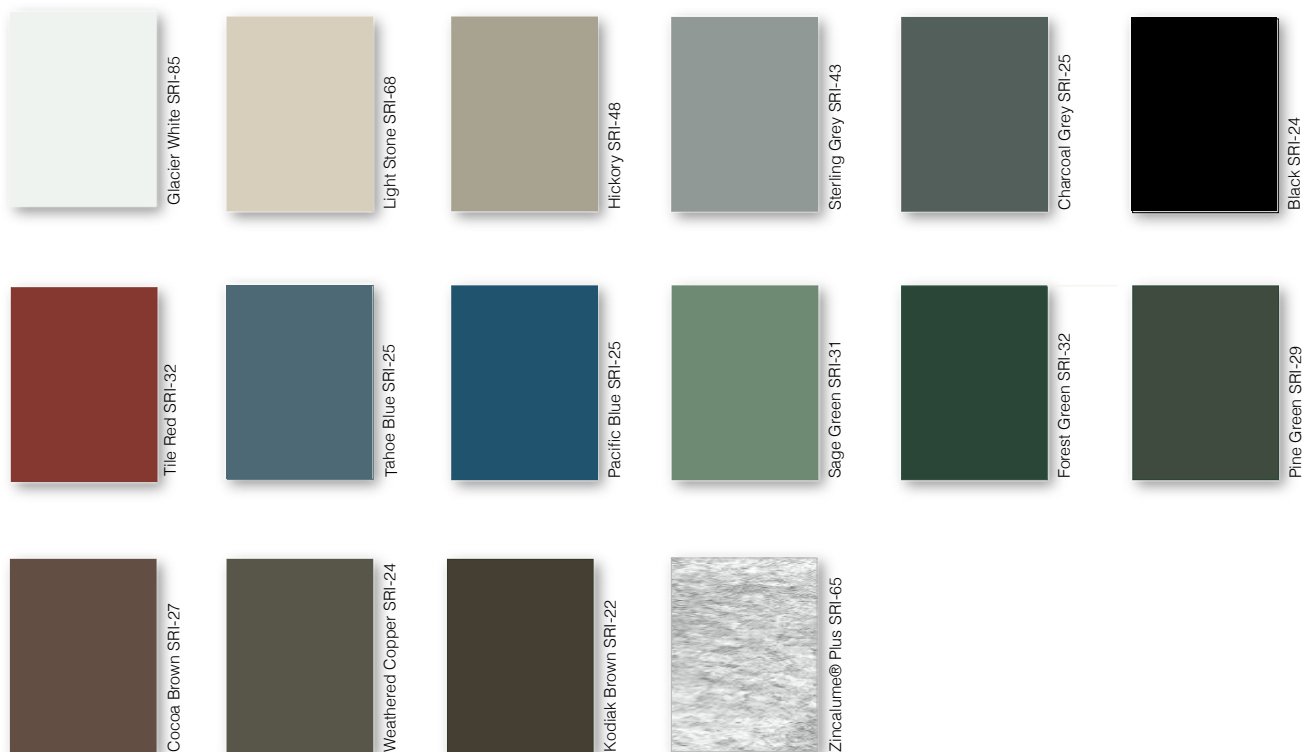

These printed chips provide a close representation of the colors. Metal samples are available upon request. Coatings are low gloss 10-15% sheen.

"Oil canning" is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection.

SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.



steelscape

