


Lap Detail

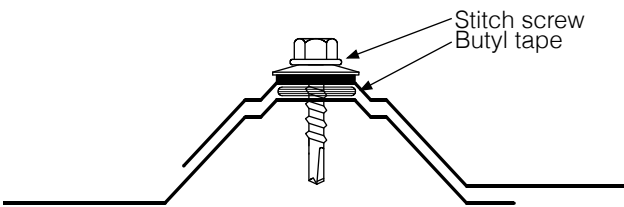

KEY FEATURES

- 29 & 26 gauge Tru-Gauge™
- ASTM 653 & 792
- Recommended minimum pitch 3:12
- Custom lengths 1' to 35'-No short length cut charge
For longer lengths please inquire
- Long length flashings available up to 21'
- Fiberglass and Polycarbonate skylight panels available to match profile
- Panel is available in a wide variety of "Cool" baked on ARMORTECH™ Colors. See color chart or inquire for availability
- Easy-to-order standard and custom made trim and accessory packages available
- Color matched neoprene washered screws

Allowable Live Load in PSF			Span in feet (steel only)				
SPAN TYPE	GAUGE	KSI	2'	2' 6"	3'	3' 6"	4'
SINGLE SPAN	26	80	112	72	50	36	28
DOUBLE SPAN	26	80	95	61	42	32	24
THREE OR MORE SPAN	26	80	119	76	53	39	29
SINGLE SPAN	29	80	86	55	39	28	22
DOUBLE SPAN	29	80	72	46	32	24	18
THREE OR MORE SPAN	29	80	90	52	40	29	23


MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ Painted Steel
.015" (thickness prior to painting)
G-90 Galvanized or AZ-50
- 26 gauge ArmorTech™ Painted Steel
.019" (thickness prior to painting)
G-90 Galvanized or AZ-50
- 29 & 26 gauge bare Zinalume® Plus with
Clear Acrylic Coating AZ-55
- 29 & 26 gauge bare G-90 Galvanized

Standard Panel Weights		
Gauge	LBS SQFT	LBS LF
29	.67	2.02
26	.9	2.70


KEY FEATURES

- 19 Standard Colors, Zinalume® Plus and Galvanized
- ARMOR TECH™ Paint System-the ultimate in exterior durability
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

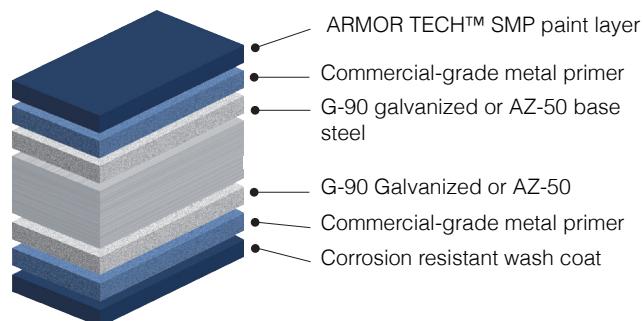

STANDARD COOL ARMOR TECH™ SMP COLORS

40-Year Residential Manufacturer's Limited Warranty

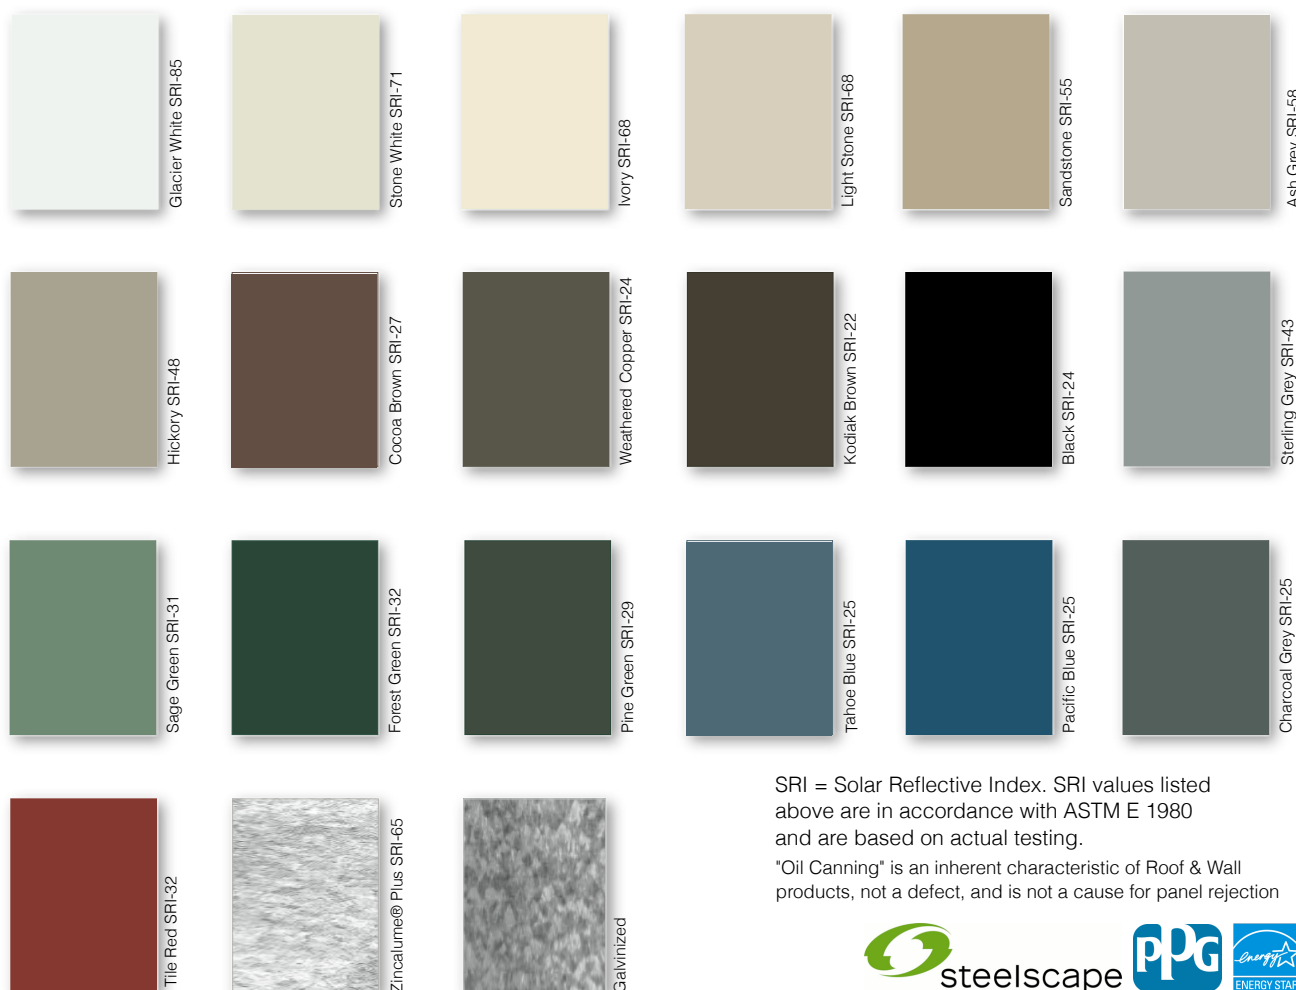

SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.

"Oil Canning" is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection